


# RX Snake

 ACCUREX

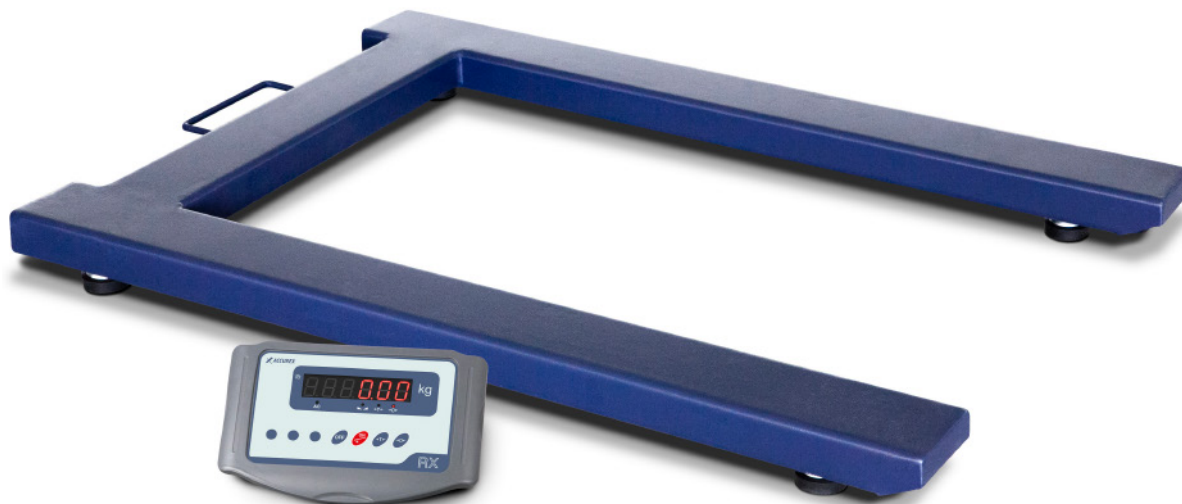

## Industrial pallet U shape floor scale


To weigh pallets without ramps and easily transport it to another location thanks to its design.

- Industrial scale for weighing heavy duty european and UK pallets.
- With front wheels and handle for easy transport.
- Very resistant steel structure with epoxy treatment.
- Low height for easy access of only 90 mm.
- Allows pallet weighing without the need for ramps.
- Nickel-plated steel load cells, IP67 protection.
- Height adjustable feet to adapt it to the surface of use.
- With LED display RX indicator and 400 cm long cable.
- 1500 kg capacity and 0.5 kg display resolution.
- Operating autonomy with internal battery up to 50 hours.
- Weighing indicator with 20 mm LED digits and high luminosity.
- Designed in Europe and manufactured by Gram Group.

The Accurex RX Snake scale models are products for professional use, they can withstand hard and intensive treatment. They are manufactured with a lacquered steel structure and a highly reliable RX electronic indicator.

The RX indicator with 4 metres of cable length can be placed at a distance from the platform. The response of the weight reading is extremely fast, in less than 2 seconds it shows the stable weight accurately.



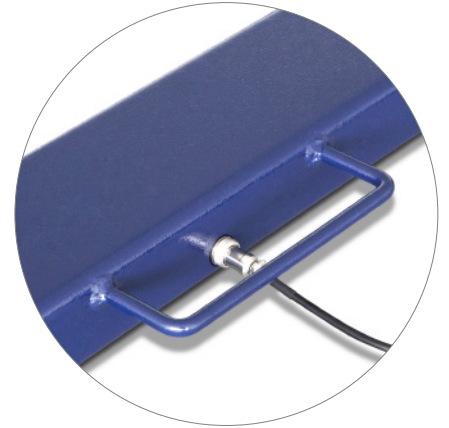

It is powered by a 220V network and also by its internal battery, which is recharged by the same network cable. While the scale is being used, its battery is being recharged simultaneously.

Zero adjustment function. The unit can be zeroed at the press of a key.

Tare function. The weight of a trolley, empty shelf or any other container can be deducted by pressing the tare key.

Calibration as standard. The equipment is supplied duly calibrated and adjusted by our calibration laboratory located in Barcelona (audited annually by the European notified body NMI).



## Operational functions

- Setting to zero.
- Taring of receptacles with tare memory.

## Technical features

Model	RX Snake 1,5T
Reference	71949
Capacity	1500 kg
Resolution	500 g
Weighing units	kg
Power	Mains 220 V, 50 Hz
Working temperature	0° / +40°C
Structure	Steel with baked epoxy paint
Load Sensors	4 Xcell XF Cells
Junction box	hermetic in ABS
Sheet metal thickness (mm)	5
Dim. weighing area (mm)	840 x 1210
Minimum height (mm)	90
Maximum height (mm)	105
Platform net weight (kg)	40
Packing dimension (mm)	900 x 1270 x 80
Total weight with packaging (kg)	50

## External dimensions (mm)

